



**CUSTOM SIZES AVAILABLE!**

Stockton Custom Fabrication

877-786-2587

custom@StocktonProducts.com




**PRODUCTS™**

# TWBF: Tru-Weep™ Base Flashing

- Custom Sizes Available, Contact Customer Service For Details
- Included 3/16 x 2" Weep Slots
- Available in Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Stainless Steel (SS) or Zinc (Z)

The Tru-Weep™ Weep Base Flashing is a single piece counter flashing stucco weep screed specifically designed to be used with drainage mat transition points between dissimilar claddings. Weep slots are located along the back of the sloped leg in alignment with the drainage mat to allow water to efficiently exit the stucco assembly.

Tru-Weep™ Base Flashing is in compliance with 2021 IBC: 2510.6.1

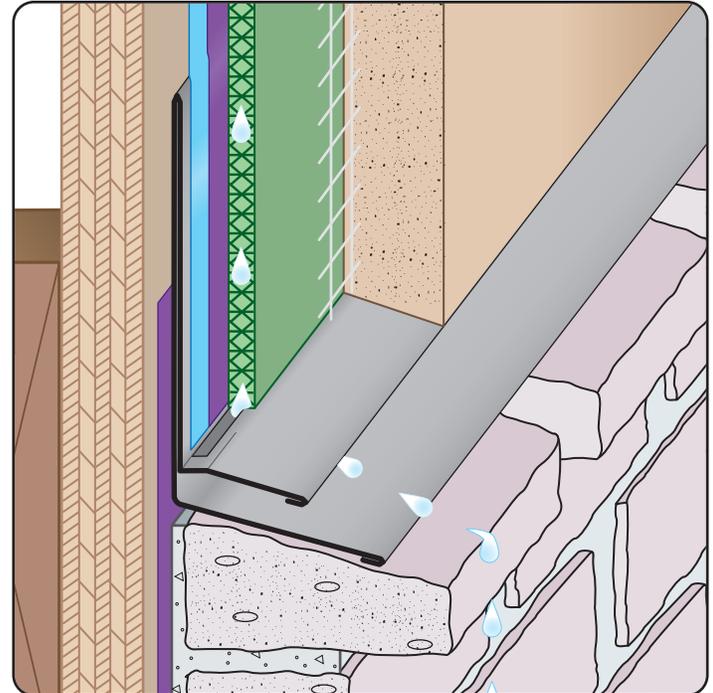

### Most Common Sizes

**X Sizes:** 1 1/2", 1 3/4" or 2"

**Y Sizes:** 1 1/8", 1 1/4" or 1 1/2"

**Length:** 120"

### Materials And Finishes:


Details: [stpro.us/MET](http://stpro.us/MET)

Aluminum (A), Copper (C), Galvanized Steel (GS), Bonderized (BN), Stainless Steel (SS) or Zinc (Z)

### ASTM Codes:

Details: [stpro.us/ASTM](http://stpro.us/ASTM)

All Accessories are fabricated from prime galvanized steel G90 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69. Stainless Steel A480/A480M A580M (Stainless Steel) For installation and placement instructions refer to ASTM C1063, C841 and C926.

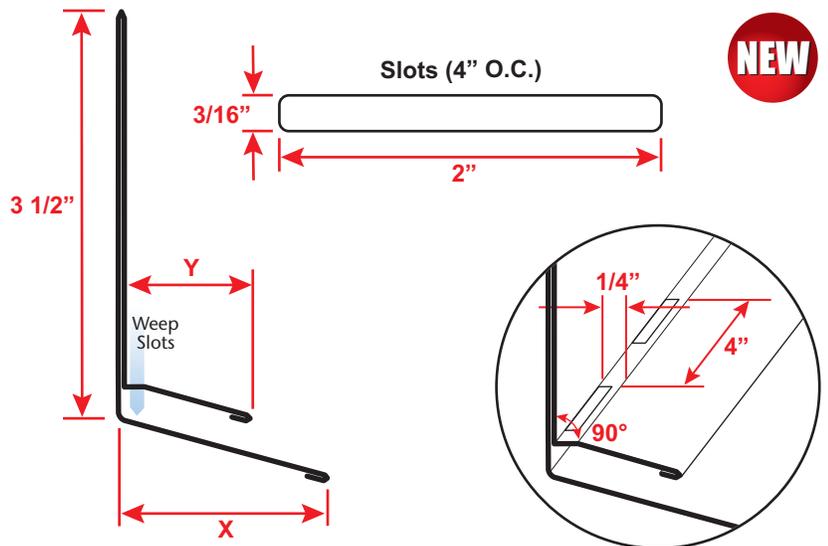


<b>QUOTE</b>	Company: _____	QTY: _____	PO Number: _____
	Name: _____	Material/Gauge: _____	Job/Project: _____
	Address: _____	X Size: _____	Notes: _____
	City: _____	Y Size: _____	_____
	State/ZIP: _____	Length: _____	_____
	Phone: _____		_____
	eMail: _____		_____

**877-786-2587 • StocktonProducts.com**



## TWBF: Tru-Weep™ Base Flashing

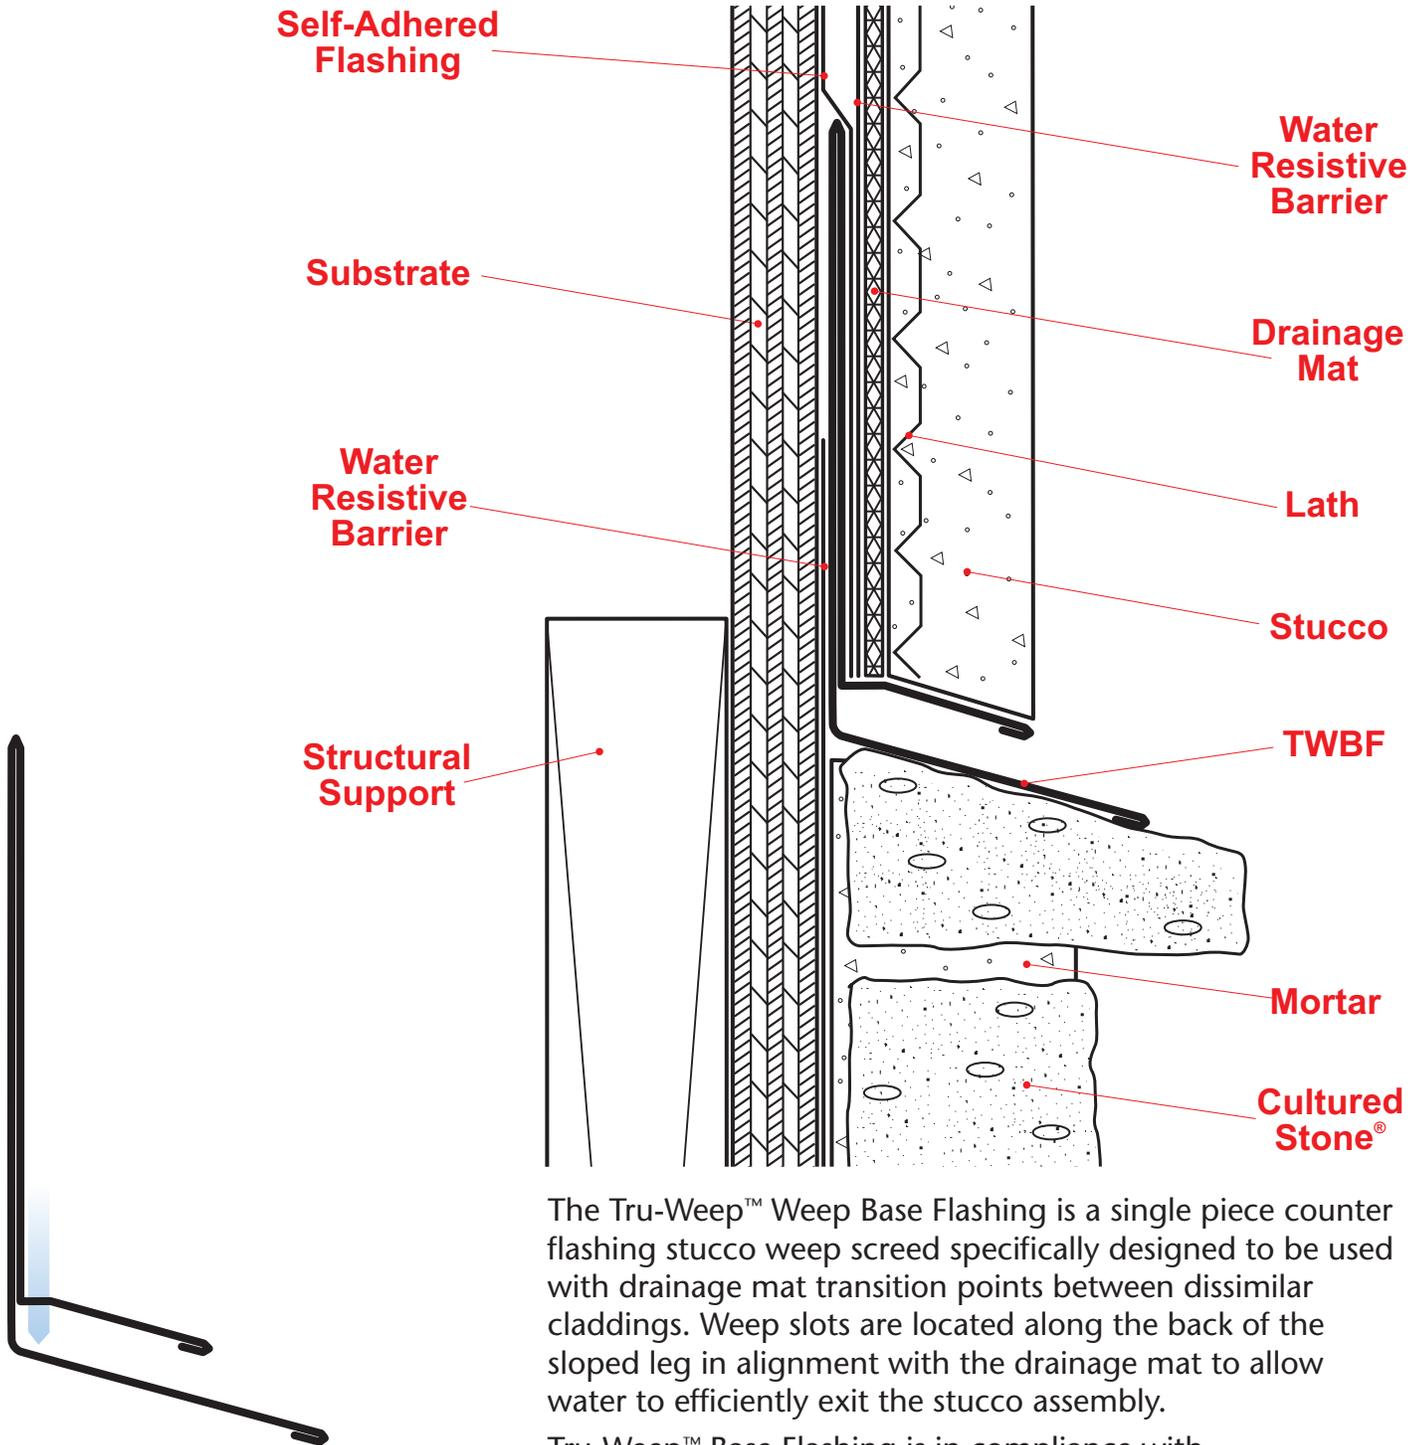

The Tru-Weep™ Weep Base Flashing is a single piece counter flashing stucco weep screed specifically designed to be used with drainage mat transition points between dissimilar claddings. Weep slots are located along the back of the sloped leg in alignment with the drainage mat to allow water to efficiently exit the stucco assembly.

Tru-Weep™ Base Flashing is in compliance with  
2021 IBC: 2510.6.1

**Note:** This drawing is supplied solely to assist in the selection and application of product manufactured by Stockton Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.